


Aquaflex Superglide Leading Edge Installation Instructions

Package Contents

Pool Cover with blue net leading edge hem attached.
Foam filled blue rigid pipe sections.
Blue webbing yoke assembly (straps attached to black ring).
Blue pulling webbing with dog clip attached.
Solar protection sheet.

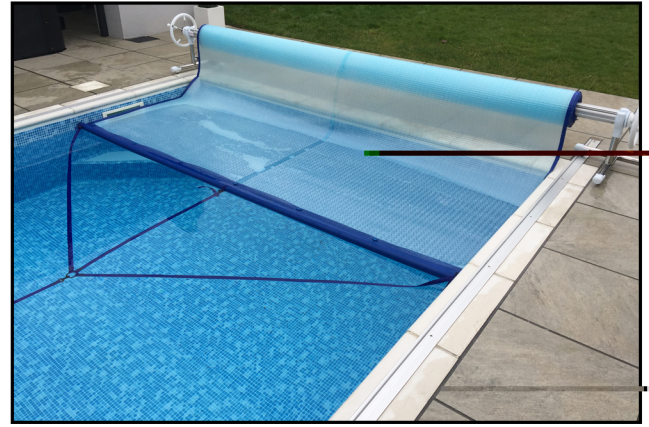


Please note the number and length of foam filled rigid pipe sections will vary depending on the width of your cover. The number of yoke straps will also vary depending on the width of your cover.

Assembly Procedure

Lay the cover onto your pool with the leading edge at the opposite end to the cover roller.

Pull the leading edge hem over the end of the pool so that it lays flat on the pool surround.

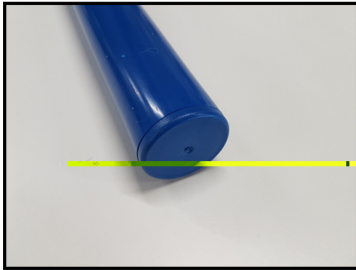

Find the two outer foam filled rigid pipe sections (each with the blue end stoppers) and lay them on the leading edge hem so that the stopper ends are located at the ends of the leading edge hem.




Find the centre section or sections of the foam filled rigid pipe sections (with one or two male dowels with inset rubber o rings protruding).

Lay these centre sections on the leading edge hem and check that the eventual length of the rigid blue pipe matches the length of the leading edge hem.

Smear a small quantity of washing up liquid onto the male dowels and push the dowels into the open ends of the outer foam filled rigid pipe sections. (wider covers will have two or more centre sections that are to be joined together in the same way).

Lift the completed foam filled pipe and slide it into the leading edge hem. (It may be easier if the hem and pipe are wet). Make sure that the ends of the pipe are flush with the ends of the leading edge hem.

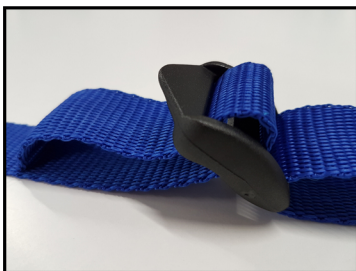

Take the towing yoke and attach the ends of all the straps to the buckles attached to the leading edge hem ensuring that with the pulling ring on the centre line of the cover all of the yoke straps are of even tension. This is important as it spreads the pulling stress on the pool cover evenly across the width of the cover. (more tension on one strap can cause the cover to rip).

Take the pulling strap with the dog clip attached and attach the dog clip to the pulling ring. Attach the other end of the cover to your pool roller.